

***MATERIAL**


**BODY : FR-NYLON WITH 33% GLASS
 FILLD UL 94V-0 RATED
 CONTACT : PHOSPHOR BRONZE**

***FINISH**

CONTACT : TIN PLATED OVER NICKEL.

***SPECIFICATION**

**APPLICATION FOR 3V LITHIUM BATTERY
 INSULATOR RESISTANCE : 5000 MEGAOHMS MIN
 OPERATION TEMPERATURE : -55° TO +105°
 DURABILITY : 50 CYCLES MIN
 CONTACT RESISTANCE : 30 MILLIOHMS.**

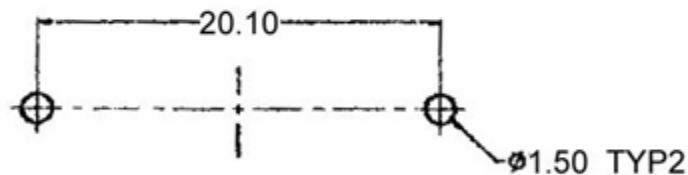

P.C. BOARD LAYOUT

| | | | | | |
|-----|------|-------------------------------|---------------|--------|-----------------------|
| 3 | | MICROPOWER BATTERY CO. | | | |
| 2 | | | | | |
| 1 | | | | | |
| NO. | DATE | NAME | BH-2032-THM20 | | |
| | | SCALE | 4 : 1 | APPD. | <i>skwgin</i> |
| | | UNIT | MM | CHKD. | <i>sumritinglikan</i> |
| | | MAT'L | | DWN. | |
| | | DATE | 02/16/04 | DR NO. | BH-2032 |

General Tolerances:
 Angel: +/- 1°
 Dim: 0.0 +/- 0.25
 0.00 +/- 0.10
 0.000 +/- 0.00