

## Rechargeable Sealed Lead-Acid Battery

# PS-121400

## 12 Volt 140 Amp. Hrs.



### Features:

- Absorbent Glass Mat (AGM) technology for superior performance.
- Valve regulated, spill-proof construction.
- Power/volume ratio yielding unrivaled energy density.
- Rugged ABS plastic case and cover
- Approved for transport by air. D.O.T., I.A.T.A., F.A.A. and C.A.B. certified.
- U.L. recognized under file number MH20845.




### PERFORMANCE SPECIFICATIONS


<b>Nominal Voltage</b> .....	12 volts (6 cells in series)
<b>Nominal Capacity</b>	
20 hour rate (7.0A to 10.50 volts) .....	140 A.H.
10 hour rate (13.5A to 10.50 volts) .....	135 A.H.
5 hour rate (24.0A to 10.20 volts) .....	120 A.H.
1 hour rate (84.0A to 09.00 volts) .....	84 A.H.
15 min rate (260.0A to 09.00 volts) .....	65 A.H.
<b>Approximate Weight</b> .....	102.0 pounds (46.36 kg)
<b>Energy Density (20 hour rate)</b> .....	1.71 Watt-hours/cubic inch (104.0 Watt-hours/l)
<b>Specific Energy (20 hour rate)</b> .....	16.5 Watt-hours/pound (36.24 Watt-hours/kg)
<b>Internal Resistance (Fully Charged Battery)</b> .....	2.5 milliohms (approximately)
<b>Maximum Discharge Current ( ≤ 7 Min.)</b> .....	420 amperes
<b>Maximum Short-Duration Discharge Current ( ≤ 10 Sec.)</b> .....	850 amperes
<b>Terminals</b> .....	Type 'B': Threaded copper insert terminals with mating M6 bolt
<b>Shelf Life — % of nominal capacity at 68° F (20° C)</b>	
1 Month.....	97%
3 Months.....	91%
6 Months.....	83%
<b>Operating Temperature Range</b>	
<b>Charge</b> .....	-4°F (-20°C) to 122°F (50°C)
<b>Discharge</b> .....	-4°F (-20°C) to 140°F (60°C)
<b>Case</b> .....	ABS Plastic

CONSTANT POWER DISCHARGE RATINGS							
MODEL	FINAL VOLTAGE	WATTS PER CELL @ 25° C					
		5 MIN	10 MIN	15 MIN	20 MIN	30 MIN	60 MIN
PS-121400	1.75	680	510	432	366	302	176
	1.70	720	550	462	376	304	180
	1.67	740	560	480	381	306	182


Discharge Characteristics

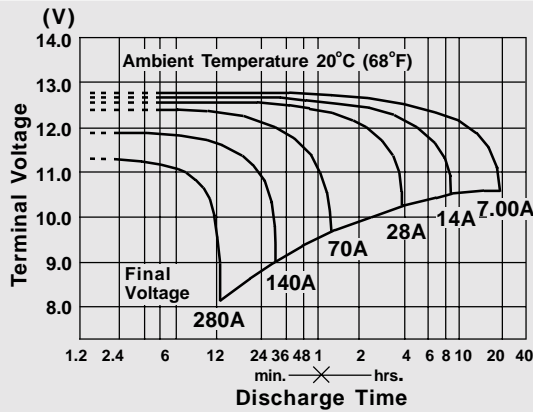

Shelf Life and Storage

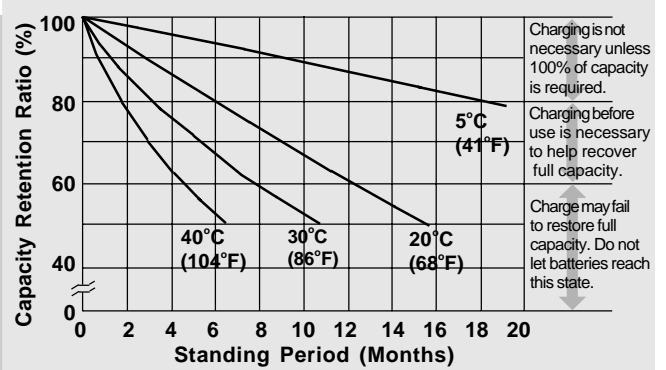

Discharge Time vs. Discharge Current

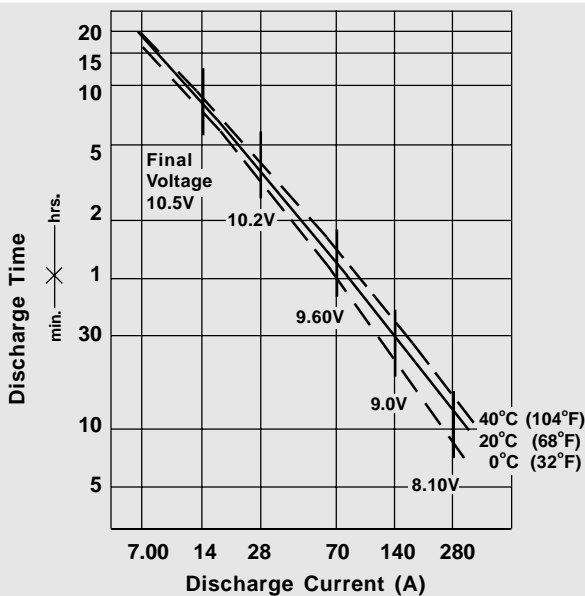


**CHARGING**

**Cycle Applications:** Limit initial current to 42A. Charge until battery voltage (under charge) reaches 14.40 to 14.70 volts at 68°F (20°C). Hold at 14.40 to 14.70 volts until current drops to approximately 1.4A.  
**“Float” or “Stand-By” Service:** Hold battery across constant voltage source of 13.50 to 13.80 volts continuously.

**NOTE:** Due to the self-discharge characteristics of this type of battery, it is imperative that they be charged after 6-9 months of storage, otherwise permanent loss of capacity might occur as a result of sulfation.

Physical Dimensions: in. (mm)

Terminals

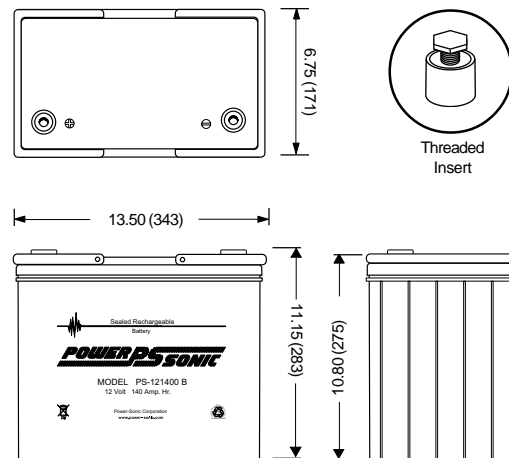

All data subject to change without notice.

Tolerances are +/- 0.04 in. (+/- 1mm) and +/- 0.08 in. (+/- 2mm) for height dimensions.



**SALES & MARKETING**  
 3106 Spring Street  
 Redwood City, CA 94063 USA  
 Tel: 650-364-5001 Fax: 650-366-3662  
 national-sales@power-sonic.com



**ISO9001-2000**  
 FM39170

www.power-sonic.com

**CUSTOMER SERVICE**  
 7550 Panasonic Way  
 San Diego, CA 92154 USA  
 Tel: 619-661-2030 Fax: 619-661-3648  
 customer-service@power-sonic.com