



POWER *PS* SONIC

**RECHARGEABLE SEALED LEAD-ACID BATTERY
HIGH-RATE SERIES**



PSH-1255

12 Volt 6.0 Amp. Hrs.

Features:

- Absorbent Glass Mat (AGM) technology for superior performance.
- Designed specifically for high-rate discharge (UPS) applications
- 24 Watts/cell for 15 min. of constant power
- Rugged plastic case and cover
- Approved for transport by air. D.O.T., I.A.T.A., F.A.A. and C.A.B. certified.
- U.L. recognized under file number MH 20845.




PERFORMANCE SPECIFICATIONS


Nominal Voltage	12 volts (6 cells in series)
Nominal Capacity	
20 hour rate (300mA to 10.50 volts)	6.00 A.H.
10 hour rate (560mA to 10.50 volts)	5.60 A.H.
5 hour rate (1.02A to 10.20 volts)	5.10 A.H.
1 hour rate (3.72A to 9.00 volts)	3.72 A.H.
15 min. rate (11.76A to 7.80 volts)	2.94 A.H.
Approximate Weight	4.19 pounds (1.9 kg)
Energy Density (20 hour rate)	1.85 Watt-hours/cubic inch (113.2 Watt-hours/l)
Specific Energy (20 hour rate)	17.2 Watt-hours/pound (37.9 Watt-hours/kg)
Internal Resistance (Fully Charged Battery)	22 milliohms (approximately)
Maximum Discharge Current (≥ 7 Min.)	18 amperes
Maximum Short-Duration Discharge Current (≥ 7 Sec.)	60 amperes
Terminals	Standard: "F2" Quick disconnect tabs, 0.250" x 0.032", mate with AMP. INC. FASTON "250"
Shelf Life — % of nominal capacity at 68° F (20° C)	
1 Month.....	97%
3 Months.....	91%
6 Months.....	83%
Operating Temperature Range	
Charge	-4°F (-20°C) to 122°F (50°C)
Discharge	-4°F (-20°C) to 140°F (60°C)
Case	ABS Plastic

CONSTANT POWER DISCHARGE RATINGS								
MODEL	FINAL VOLTAGE	WATTS PER CELL @ 25° C						
		5 MIN	10 MIN	15 MIN	20 MIN	25 MIN	30 MIN	60 MIN
PSH-1255	1.75	38	27	22	17	12	9.5	6.4
	1.70	39	28	23	17.5	12.5	9.6	6.5
	1.67	40	29	24	18	13	9.8	6.7


Discharge Characteristics (25°C, 77°F)

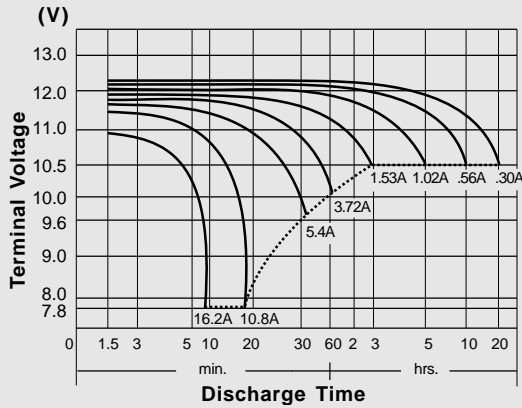

Shelf Life and Storage

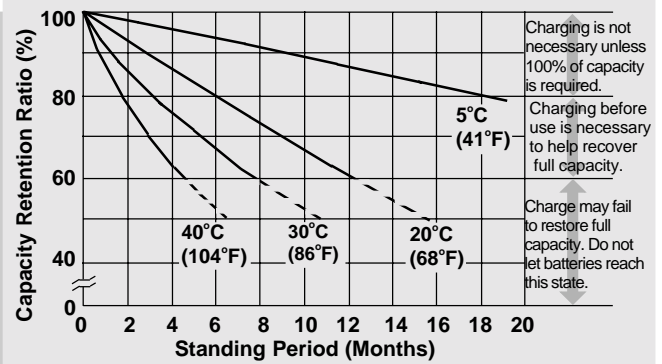

Discharge Time vs. Discharge Current

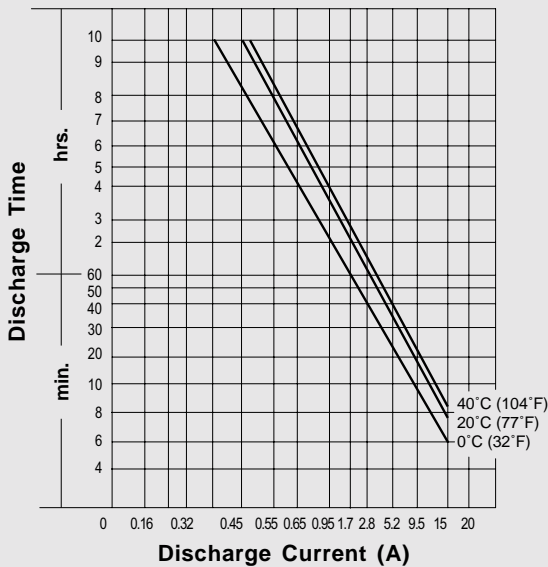


CHARGING

Cycle Applications: Limit initial current to 1.8A. Charge until battery voltage (under charge) reaches 14.40 to 14.70 volts at 68°F (20°C). Hold at 14.40 to 14.70 volts until current drops to approximately 60mA. **“Float” or “Stand-By” Service:** Hold battery across constant voltage source of 13.50 to 13.80 volts continuously.

NOTE: Due to the self-discharge characteristics of this type of battery, it is imperative that they be charged after 6-9 months of storage, otherwise permanent loss of capacity might occur as a result of sulfation.

Physical Dimensions: in. (mm)

Terminals

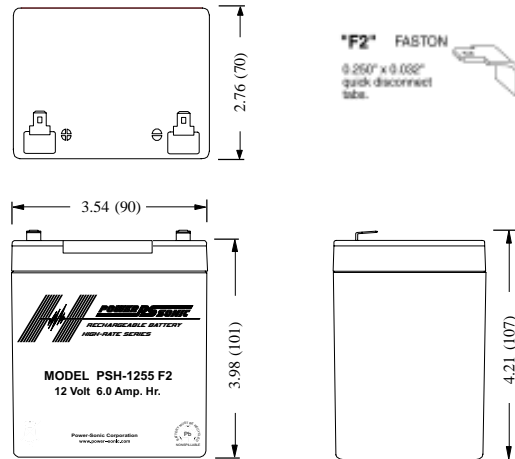

Tolerances are +/- 0.04 in. (+/- 1mm) and +/- 0.08 in. (+/- 2mm) for height dimensions.

All data subject to change without notice.



SALES & MARKETING
 3106 Spring Street
 Redwood City, CA 94063 USA
 Tel: 650-364-5001 Fax: 650-366-3662
 national-sales@power-sonic.com



ISO 9001-2000
 FM39170

www.power-sonic.com

CUSTOMER SERVICE
 7550 Panasonic Way
 San Diego, CA 92154 USA
 Tel: 619-661-2030 Fax: 619-661-3648
 customer-service@power-sonic.com