




# DELTRAN Battery Tender® Power Tender Plus Installation Instructions



**Weight and Mounting Hardware** – The battery charger with its input and output cables weighs approximately 3.5 pounds. The size of the mounting hardware is not particularly critical. A 10/24 coarse thread machine screw or bolt and a nut with a lock washer and washers on both sides (i.e. on the front / top of the charger flange and on the back / bottom of the mounting surface) should be sufficient to securely fasten the charger in place. The length of the screw or bolt depends on the thickness of the mounting surface.

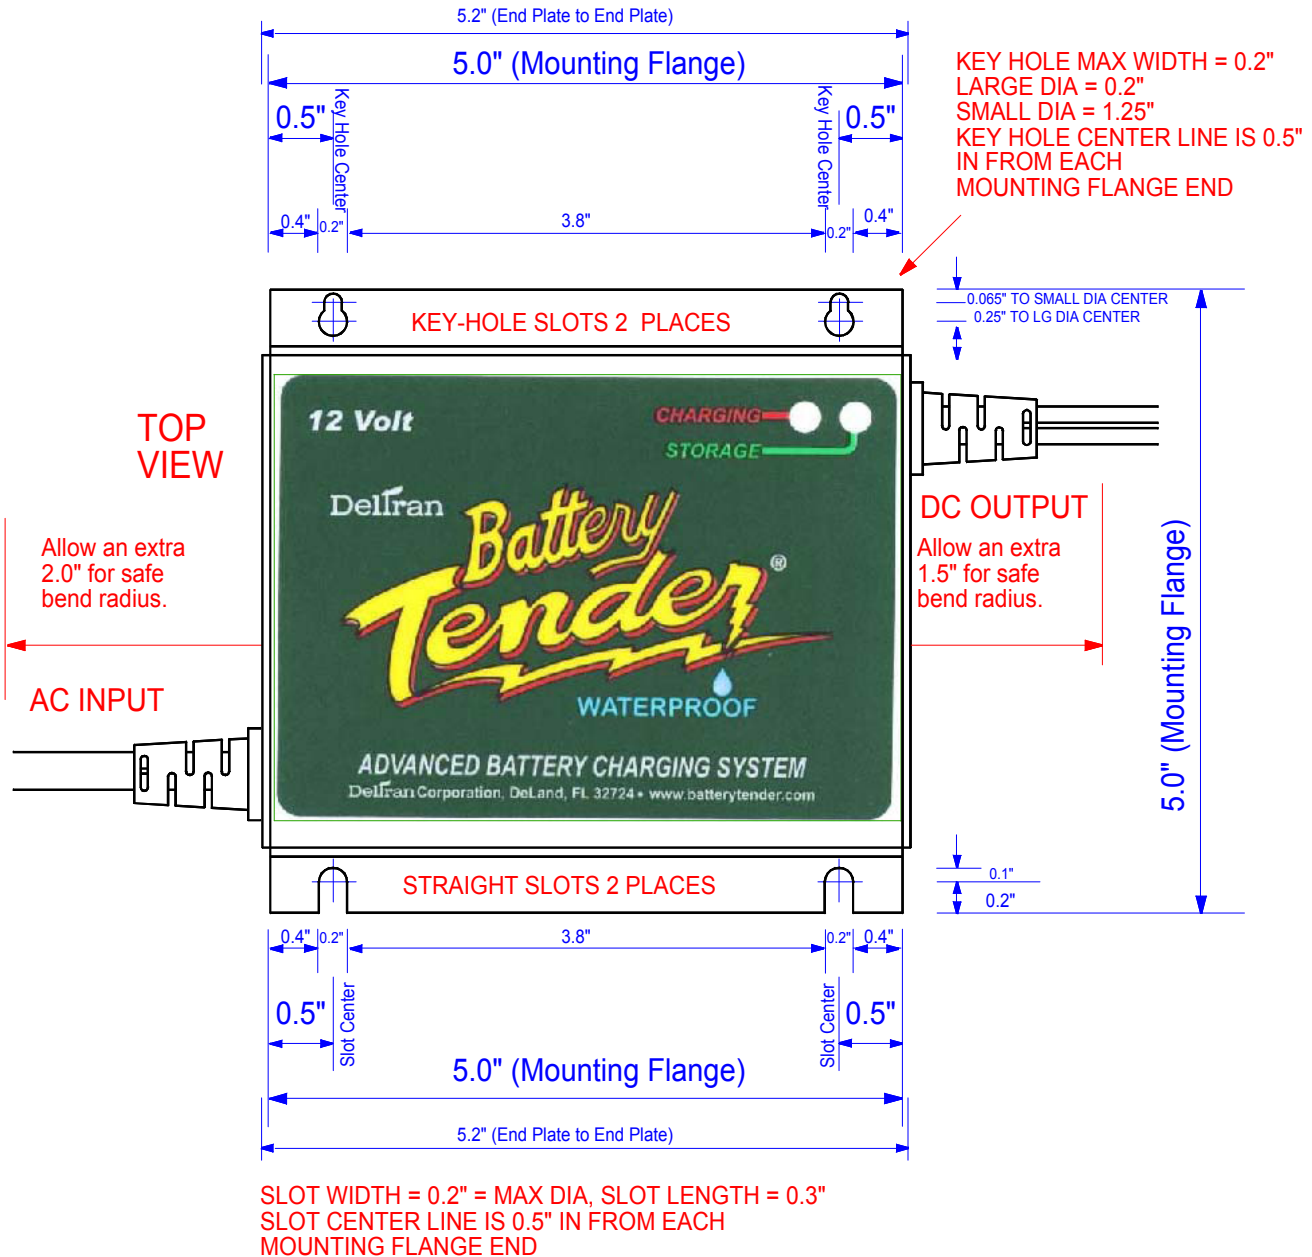

**Caution** – It is possible that part of the charger outer case may reach as high as 70° C (158° F) during normal operation, delivering full power. More than likely the maximum case temperature will be only about 50° C (122° F). However, it is important that the charger is located in an area with adequate ventilation and that it is mounted on a surface that is not flammable.