

DURACELL®



COPPERTOP

MN1604


Size: 9V (6LR61)

Alkaline-Manganese Dioxide Battery



Zn/MnO₂



Nominal voltage	9 V
Impedance	1,700 m-ohm @ 1 kHz
Typical weight	45 g (1.6 oz)
Typical volume	22.8 cm ³ (1.4 in ³)
Terminals	Miniature snap
Storage temperature range	5°C to 30°C (41°F to 86°F)
Operating temperature range	-20°C to 54°C (-4°F to 130°F)
Designation	ANSI: 1604A IEC: 6LR61

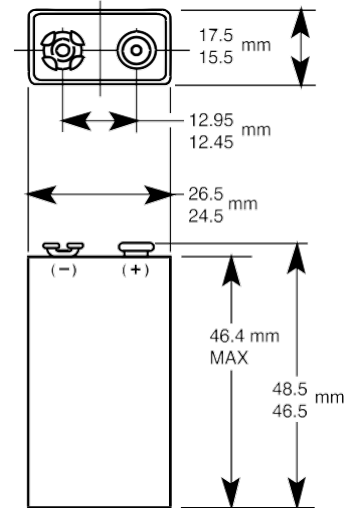

Dimensions shown are IEC standards

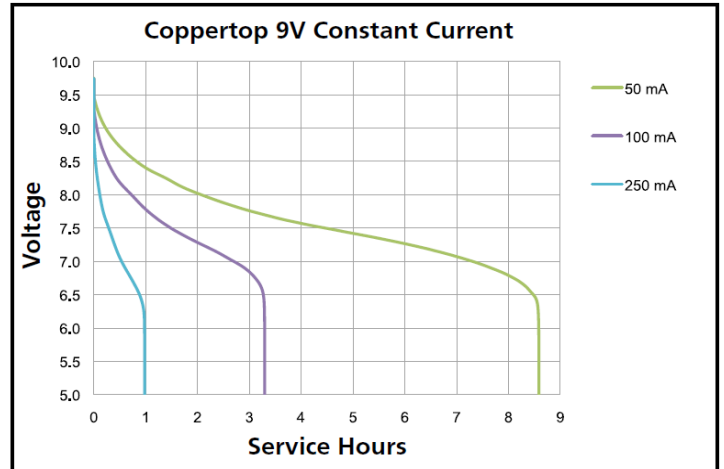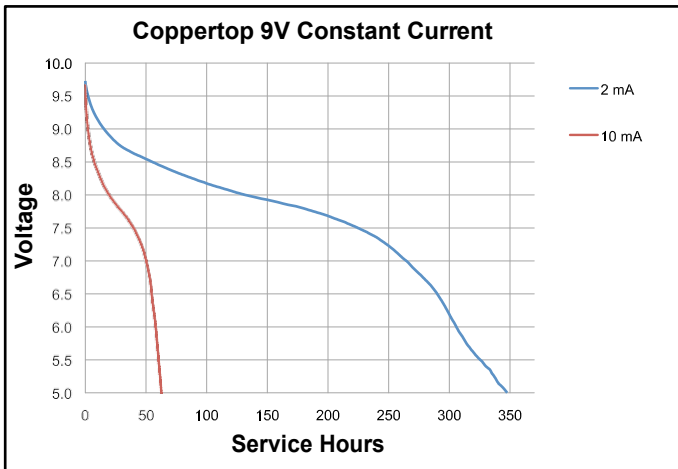

Orders and Inquiries:

MICROBATTERY.COM

7350 NW 35th Terrace, Miami, Florida 33122
Customer Service: 1-866-999-2355
Phone: 1-305-371-9200 Fax: 1-305-371-9400
www.microbattery.com

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.

DURACELL®







COPPERTOP

MN1604

Size: 9V (6LR61)

Alkaline-Manganese Dioxide Battery

Zn/MnO₂

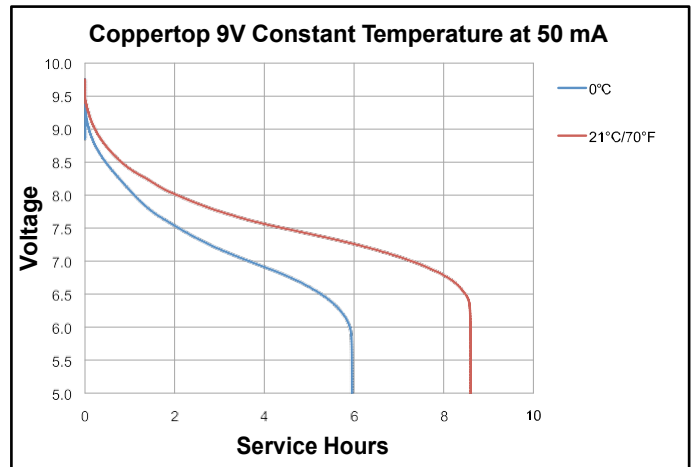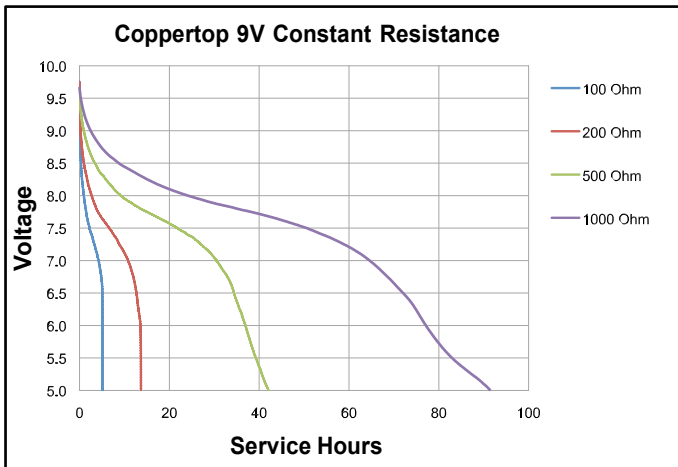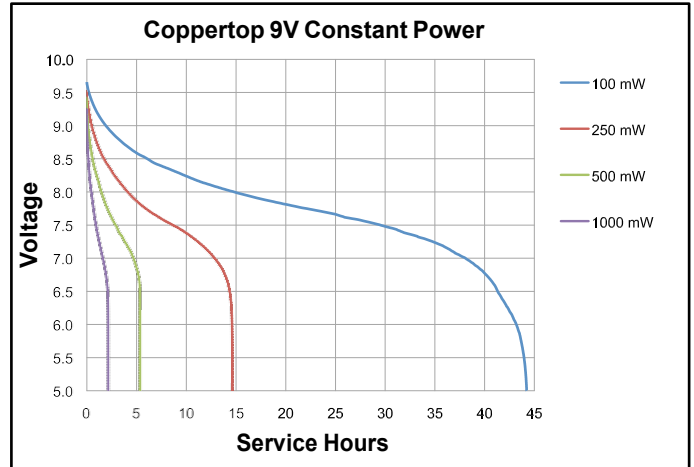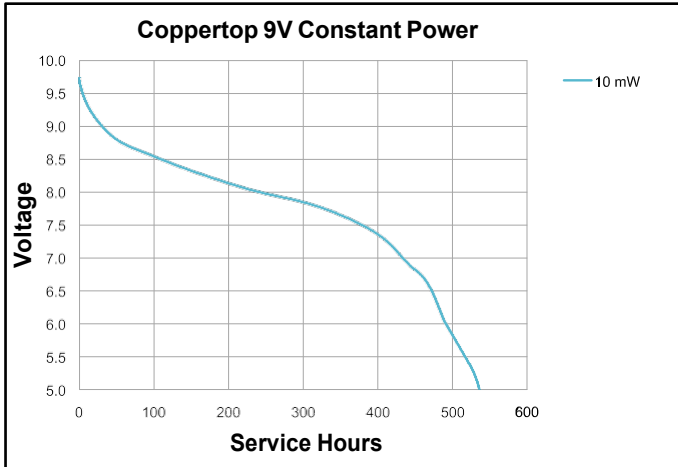

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.

Orders and Inquiries:


MICROBATTERY.COM

7350 NW 35th Terrace, Miami, Florida 33122

Customer Service: 1-866-999-2355

Phone: 1-305-371-9200 Fax: 1-305-371-9400

www.microbattery.com

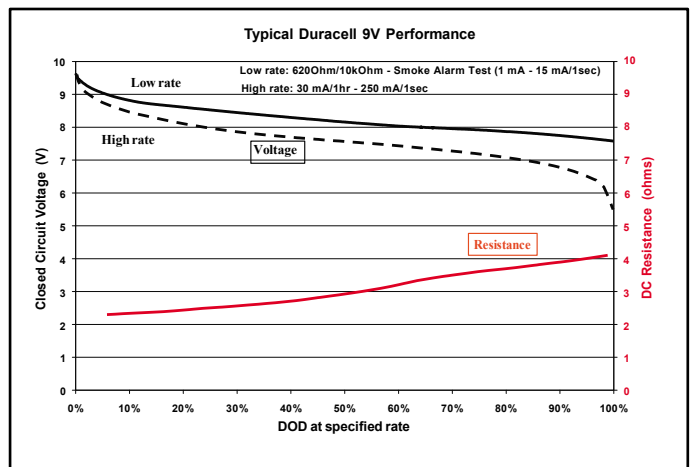

This data is subject to change. Performance information is typical. Contact Duracell for the latest information.

MN9VCTUS0413