

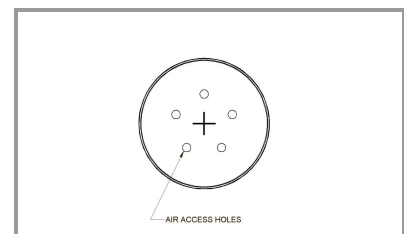
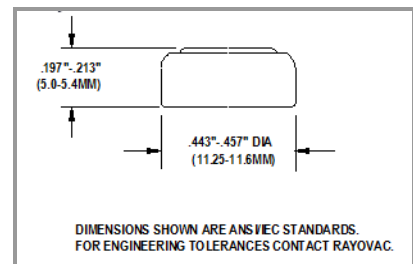


|                                    |  |
|------------------------------------|--|
| <b>Rayovac Stock Number</b>        | 675CPMF-6XE  |
| <b>Name</b>                        | 675 Zero Mercury Cochlear  |
| <b>Cell Chemistry</b>              | Zinc Air   |
| <b>Recommended Use</b>             | Cochlear, High Power Hearing Aid   |
| <b>Nominal Voltage</b>             | 1.45 volts   |
| <b>Designation</b>                 | ANSI : 7003ZD<br>IEC : PR44<br>Common : 675  |
| <b>Weight</b>                      | 1.77 grams (.06 oz)  |
| <b>Volume</b>                      | .57 cc (.035 cu. in.)  |
| <b>Environmental</b>               | Refer to <a href="#">Rayovac Material Safety Data Sheets</a> for more detailed information.  |
| <b>Operating Temperature Range</b> | -10° C to 50° C<br>(14° F to 122° F)   |
| <b>Standard Test</b>               | 42 hours – 110 ohm continuous to 0.9V at 70°F (21° C) and 50% RH.  |
| <b>High Power Test</b>             | 18 hours – 51 ohm continuous to 0.9V at 70°F (21° C) and 50% RH.   |
| <b>Storage Loss at 70°F (21°C)</b> | Less than 10% in one year with tab applied.  |
| <b>Activation and use</b>          | Remove and discard the plastic tab covering air holes. Allow the battery to stand for one minute to insure proper activation. The battery compartment must allow for an adequate oxygen supply to reach air holes. |

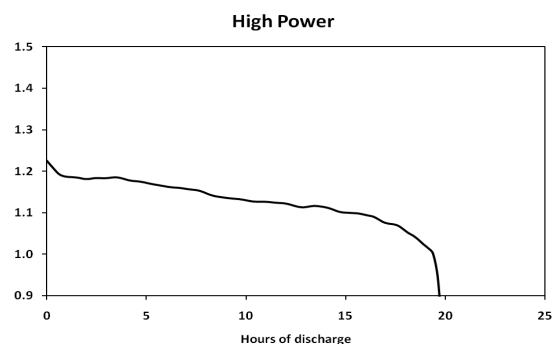

## Discharge Performance

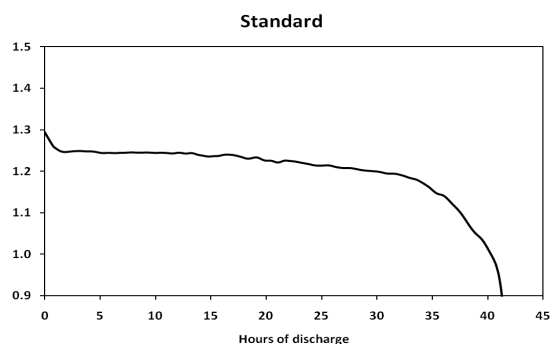

This data is subject to change. Performance information is typical. Contents herein do not constitute a warranty.

Distributed by:  
**MICROBATTERY.COM**  
7350 NW 35th Terrace, Miami, Florida 33122  
Customer Service: 1-866-999-2355 | Phone: 1-305-371-9200 | Fax: 1-305-371-9400  
[www.microbattery.com](http://www.microbattery.com)