


ENERGIZER E625G

ZEROMERCURY®

Miniature Alkaline



Industry Standard Dimensions

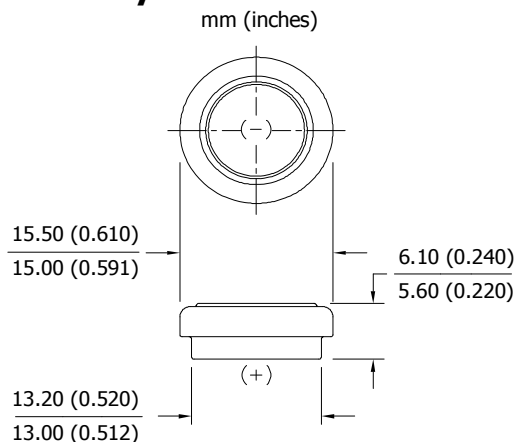


Designed specifically for photo use

Typical Discharge Characteristics

21°C (70°F)

Load: 1K ohms - Continuous

Typical Drain @ 1.25V: 1.25 mA

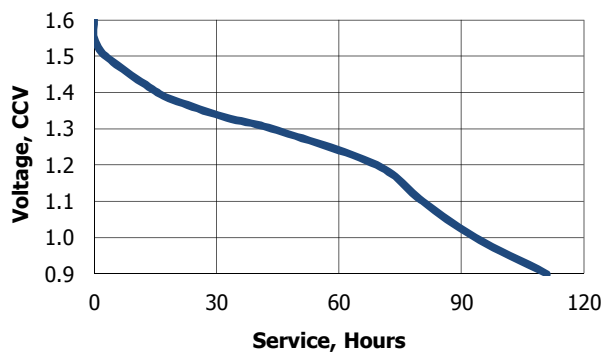


Schedule:	Typical Drains: at 1.25V (milliamperes)	Load (ohms)	Cutoff 0.9V (hours)
Continuous	1.25	1,000	112

Specifications

Chemical System:	Manganese Dioxide (MnO ₂)
Designation:	N/A
Nominal Voltage:	1.5 Volts
Typical Capacity:	140 mAh (to 0.9 volts) Rated at 1K ohms / 21°C (70°F)
Typical Weight:	3.3 grams (0.12 ounces)
Typical Volume:	1.2 cubic centimeters (0.07 cubic inch)

Cross Section

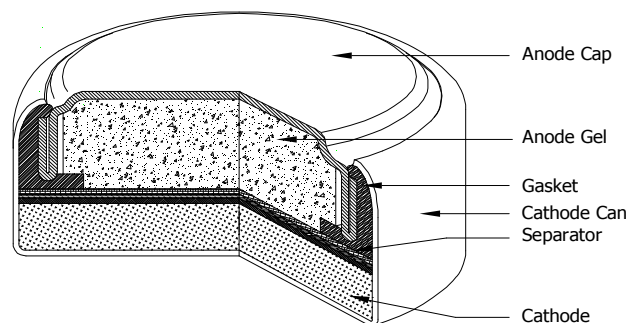

Important Notice

This data sheet contains typical information specific to products manufactured at the time of its publication.

©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.